




FP8458** 52" Ceiling Fan

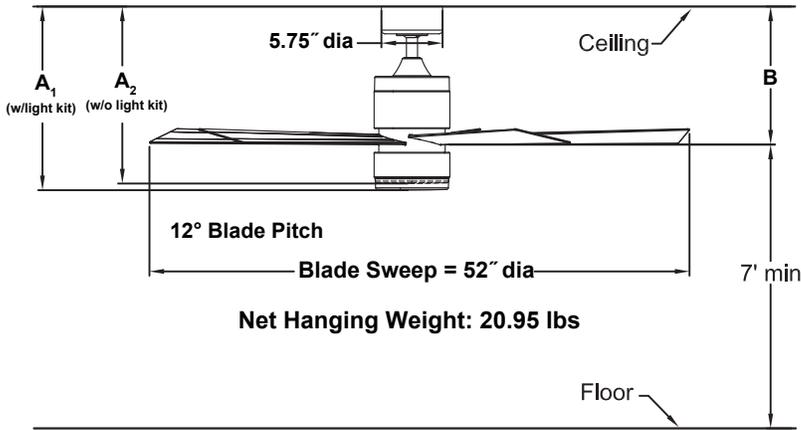

	A ₁	A ₂	B
Fan w/4.5" downrod	17.32"	16.70"	13.03"
Fan w/12" downrod	24.82"	24.20"	20.53"
Fan w/18" downrod	30.82"	30.20"	26.53"
Fan w/24" downrod	36.82"	36.20"	32.53"
Fan w/36" downrod	48.82"	48.20"	44.53"
Fan w/48" downrod	60.82"	60.20"	56.53"
Fan w/60" downrod	72.82"	72.20"	68.53"
Fan w/72" downrod	84.82"	84.20"	80.53"

Available Finishes	
BL	Black With Black Blade and Opal Frosted Glass/Steel Cap
BN	Brushed Nickel With Brushed Nickel Blade and Opal Frosted Glass/Steel Cap
DZ	Dark Bronze With Dark Bronze Blade and Opal Frosted Glass/Steel Cap
GR	Matte Greige With Weathered Wood Blade and Opal Frosted Glass/Steel Cap
MW	Matte White With Matte White Blade and Opal Frosted Glass/Steel Cap

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 35 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

MOTOR SPECS:

153 x 20 AC motor is designed for optimal performance with this fan.

BLADE SETS:

A set of five 24" composite blades is included.

LIGHTING OPTIONS:

One uplight 13-watt LED and downlight 18-watt LED included.

CONTROL OPTIONS:

TR500U hand-held remote control is included. Push button remote control with variable fan speeds, uplight, downlight, infinite light levels, fan/light timer and off button. Optional BTR9U remote control with receiver and BTR9U receiver unit are available—sold separately. Instructions are provided with each control.

DOWNROD OPTIONS:

Fan comes with 1" dia. x 4.5" long downrod (DR1-4.5). Optional downrods available in 12", 18", 24", 36", 48", 60", and 72" lengths. A downrod coupler is available for installations requiring a downrod longer than 72". Fan can be mounted on a sloped ceiling up to 27°. Most sloped ceiling installations require a downrod longer than the standard 12" downrod. Optional close-to-ceiling kit is available as well—sold separately. Optional sloped ceiling ball kits (SCB1-52) are available for slope angles greater than 27° and up to 42°. Call technical support for more information.

LOCATION USE:

Fan is rated for dry and damp locations.

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	165	5242	92	0.48	57
Med	113	3626	118	0.35	31
Low	73	2043	158	0.22	13

Energy Guide FTC			
Power (W _{ave})	Total Air Delivery (CFM _{ave})	Estimated Yearly Energy Cost (\$)	Ceiling Fan Efficiency (CFM/W)
39	4362	11	112

Uplight Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	13	1	1400	3000	90%

Downlight Bulb Information (120V)					
Bulb Type	Watts	QTY	Lumens Amount	Color Temp	CRI
LED	18	1	1400	3000	90%