

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential and light commercial applications. Ideal for use in workshops, utility rooms and garages. **If required for commercial application or operation more than eight (8) hours per day, consult factory for available options.**

### CONSTRUCTION

The diamond plate housing gives this fixture its unique look. It matches many diamond plate cabinets and work benches. The lift-and-shift white acrylic diffuser allows for tool-free lamp replacement.

### OPTICS

Utilizes (2) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

### ELECTRICAL

Standard with 120 volt, 60Hz electronic ballast ensures no flickering and quiet operation without interfering with other electronics.

For use with non-dimmable switches only.

### INSTALLATION

All mounting hardware included.

### LISTINGS

UL listed to US and Canadian safety standards and suitable for damp locations.

### WARRANTY

2-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Actual performance may differ as a result of end-user environment and application.

Note: Specifications subject to change without notice.


|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |


Indoor General Purpose

# Diamond Plate Linear Flush Mount

Linear T8 Fluorescent



| DIMENSIONS  |   |              |                   |                       |                        |                            |
|---|---|--------------|-------------------|-----------------------|------------------------|----------------------------|
| Nominal size  | Lamp configuration  | Model number | Number of lamps   | (A) Width inches (cm) | (B) Length inches (cm) | (B) Extension inches (cm)* |
| 1' x 4'   |  | 11241DP RE   | (2) 32W Linear T8 | 7-5/8" (19.4)         | 49-7/8" (126.7)        | 2-7/8" (7.3)               |
| *Extension from ceiling.<br>All dimensions are inches (centimeters) unless otherwise indicated. |   |              |                   |                       |                        |                            |

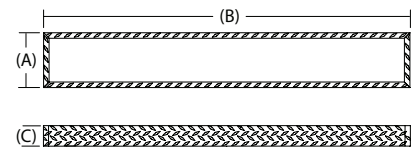

## ORDERING INFORMATION

For shortest lead times, configure products using **bolded options**.

Example: 11241DP RE

| Series <sup>1,2</sup>   | Ballast/Voltage <sup>7</sup>  | Options           |
|---|---|-------------------|
| <b>11241DP</b> 1'x4' - (2) 32W Linear T8 fluorescent lamps (required) | <b>RE</b> 120 volt residential electronic ballast (standard)<br>Other voltage and ballast types available (Consult factory) | (Consult factory) |

### Notes

- Lamps not included.
- Use with non-dimmable switches only.

## Diamond Plate Linear Flush Mount

---

### PHOTOMETRICS

Full photometric data report available within 2 weeks from request. Consult factory.