


ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0002 / C0003 / C0004 / C0005 / C0006

WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.
2. READ AND SAVE THESE INSTRUCTIONS.**

Contents of Spare Parts:

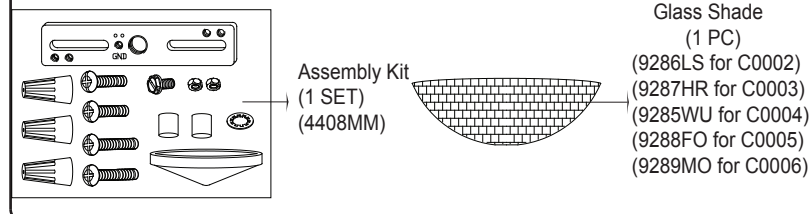

1. Thread two fixture mounting screws through the mounting strap, then secure them with two lock nuts. Adjust the length of the fixture mounting screws if necessary.
2. Attach the mounting strap to the outlet box by using two mounting screws.
3. Screw the nipple into the coupling of the fixture, secure it with a washer and hex nut. **(You can adjust the length of the nipple.)**
4. Slip the tube, cap-1 with the open side facing upward, cap-2 with the open side facing downward, secure them with hex nut.
5. Pull out the outlet wires and the house grounding wire from the outlet box. Make wire connections using the wire nuts:
 - Connect the black wire from the fixture to the black wire from the power source.
 - Connect the white wire from the fixture to the white wire from the power source.
 - Attach the fixture grounding wire to the mounting strap with the green grounding screw. Then connect it to the house grounding wire with a wire nut.Carefully put the wires back into the outlet box.
6. Attach the canopy to the mounting strap by inserting the screws, and secure it with two ball nuts.
7. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
8. Slip the glass shade and metal pad through the nipple, secure them together with hex nut.
9. Screw the finial into the nipple.
10. Turn on the power at the main fuse or circuit breaker box.

