

ASSEMBLY INSTRUCTIONS

Charles Pendant


Item # AH5002

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

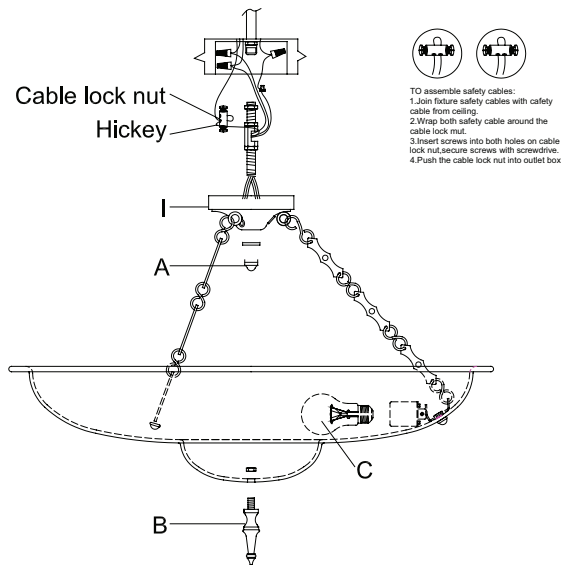

1. Follow Fig.1 and Fig. 2 to connect the safety steel cable from the fixture and the safety cable from ceiling with lock nuts.
2. Assembly the ceiling loop, nipple, nuts and hickey to center 1/4"IPS support pipe and adjust overall length to allow the canopy flush to the ceiling. When the adjustments have been completed, secure the three (3) nuts, as shown Fig.3.
3. Raise the fixture and make the nipple through canopy (I), then secure with cap(A) thread the finial(B) onto the bottom of fixture, and secure with nut.
4. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from your ceiling box using a plastic wire connect nuts, and the connection to be wrapped with electrical tape. Be sure no wire strands are exposed. If you house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.
 IT IS IMPERATIVE THAT THE J-BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect the Neutral (ribbed edge, no markings, or white) fixture wire with the Neutral (usually white) wire from your ceiling box using a plastic wire connector. And the connection to be wrapped with electrical tape. No wire strands are exposed.
6. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from your outlet box using a plastic wire connector. And the connection to be wrapped with electrical tape. No wire strands are exposed.
 DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS, OR SAFETY WILL BE COMPROMISED.
7. Tuck these wire connections neatly into the outlet box.
8. Insert light bulbs (C) (not included) into sockets.

