

ASSEMBLY INSTRUCTIONS

Gramercy Large Chandelier


Item # CHC1474

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

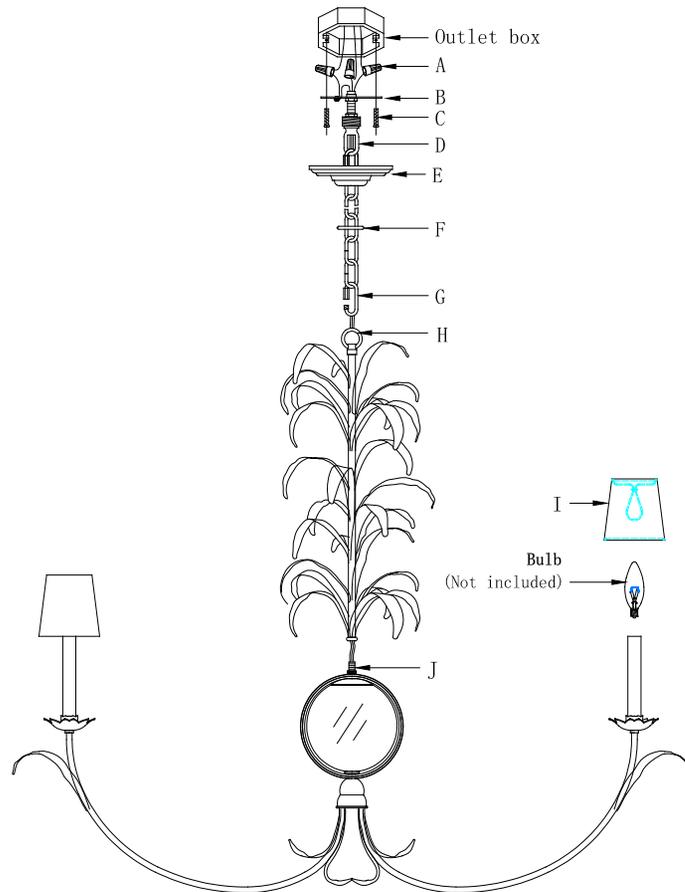

1. Carefully install the fixture leaf column onto fixture thread (J) and secure tightly. Install the crossbar (B) with ceiling loop (D) to outlet box by using mounting screws (C) provided.
2. Put canopy (E) to ceiling loop, and secure with lock collar (F).
3. Using the dimensions of the fixture as a guide, shorten the chain provided using a pair of chain pliers. Take into consideration that you will use the chain end link to mount the chandelier once you have cut the chain.
4. Unscrew the collar on the chain end link. Attach the chain end link to the ceiling loop (D).
5. Carefully raise the assembled fixture body, and attach top loop (H) to chain end link (G) and secure with threaded collar.
6. Unwrap the wiring from the top of the fixture body. Weave the power supply cord and the ground wire through the chain (G).
7. When you reach the canopy and ceiling loop, measure the wires and cut. Be certain to leave enough to connect inside the canopy.
8. Strip the insulation back on the two power supply wires about 5/8".
9. Twist the power supply and ground wires together and push through the center hole in the ceiling loop.
10. Loosen the clock collar (F) and let the canopy (E) slip down the chain carefully.



ASSEMBLY INSTRUCTIONS

Gramercy Large Chandelier


Item # CHC1474

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING * SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

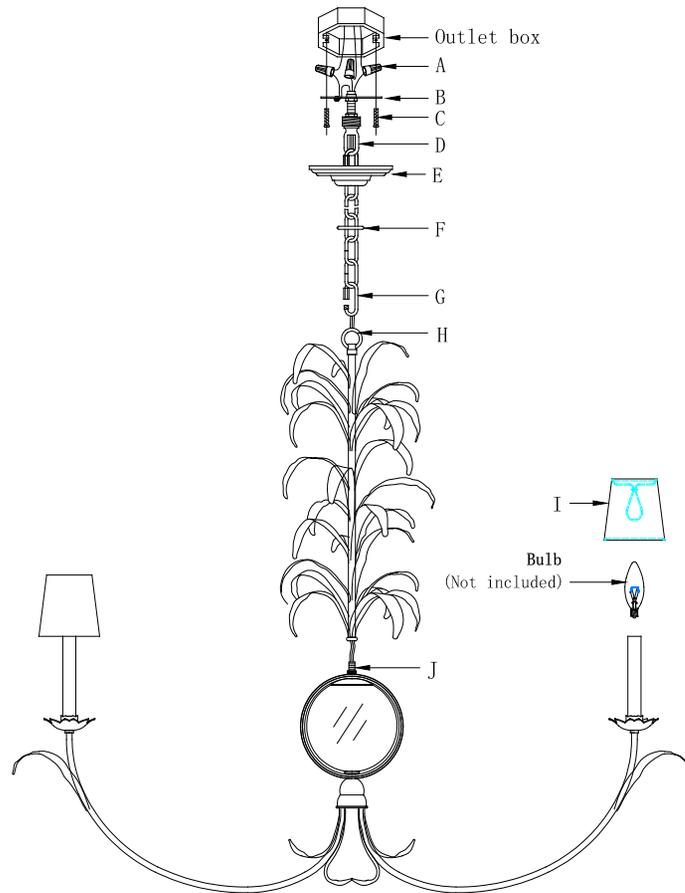

11. Connect the Ground (bare) fixture wire with the ground (usually bare) wire from ceiling box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of outlet box.
IT IS IMPERATIVE THAT THE J-BOX IN YOUR HOME BE PROPERLY GROUNDED.
12. Connect the Neutral fixture wire with the Neutral (usually white) wire from ceiling box using wire nut (A). DO NOT REVERSE NEUTRAL & HOT WIRES
13. Connect the Hot (smooth edge, markings, or black) fixture wire with the Hot (usually black) wire from outlet box using wire nut (A).
14. Tuck these wire connections neatly into the outlet box. Put canopy (E) to ceiling loop (D), and secure with lock collar (F).
15. Install the light bulbs (not included) into sockets.
16. Clip the shades (I) on the bulbs. Installation is complete, turn on power at fuse or circuit breaker.

