


# CHC1559

## ASSEMBLY & INSTALLATION GUIDE

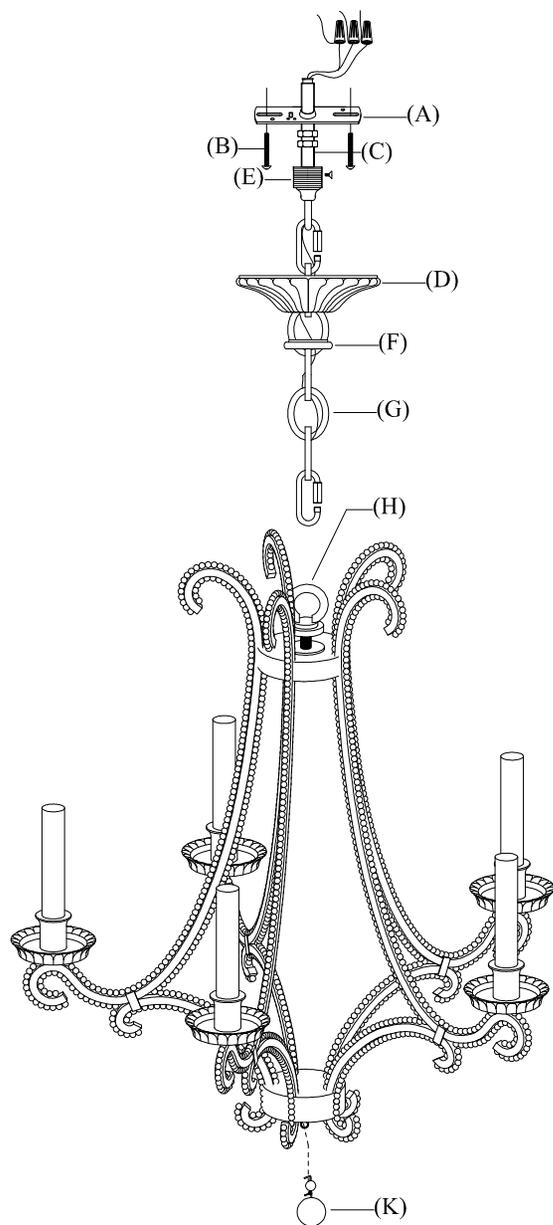

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Hook top loop (H) to the end link of the chain (G).
2. Attach mounting strap (A) to ceiling outlet box using mounting screws (B) provided.
3. Insert threaded nipple (C) in mounting strap (A). Using pliers, thread one of hex nut to nipple (C) to secure.
4. Feed wire through chain (G) and mounting loop (E).
5. Unscrewing the canopy ring (F) from chain mounting loop (E) and slide canopy (D) and canopy ring (F) on chain.
6. Attach chain mounting loop (E) to threaded nipple (C).
7. Attach chain (G) with fixture to chain mounting loop (E) at desired height.
8. To determine the hanging length, shorten the height by removing the excess chain links.
9. Attach the ground wire (silver or brass in color) from the fixture to the junction box ground wire (usually green or copper wire). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Make sure no wire strands are exposed. It is imperative that the outlet box in your home be properly grounded. Be sure no wire strands are exposed.
10. Connect the neutral wire from the fixture (ridged molded wire) to the neutral wire from the junction box (usually white). Fasten together with a plastic wire connector and wrap the connection with electrical tape. Make sure no wire strands are exposed.
11. Connect the hot wire from the fixture (smooth wire) to the hot wire (usually black) from the junction box. Fasten each together with a plastic wire connector and wrap the connection with electrical tape. Make sure that no wire strands are exposed. **DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.**
12. Tuck wire connection neatly into ceiling outlet box.
13. Hook the finial (K) to the bottom of light fixture..
14. Slip canopy (D) to ceiling and secure with threaded canopy ring (F).
15. Insert light bulbs into the sockets.