


# ASSEMBLY INSTRUCTIONS

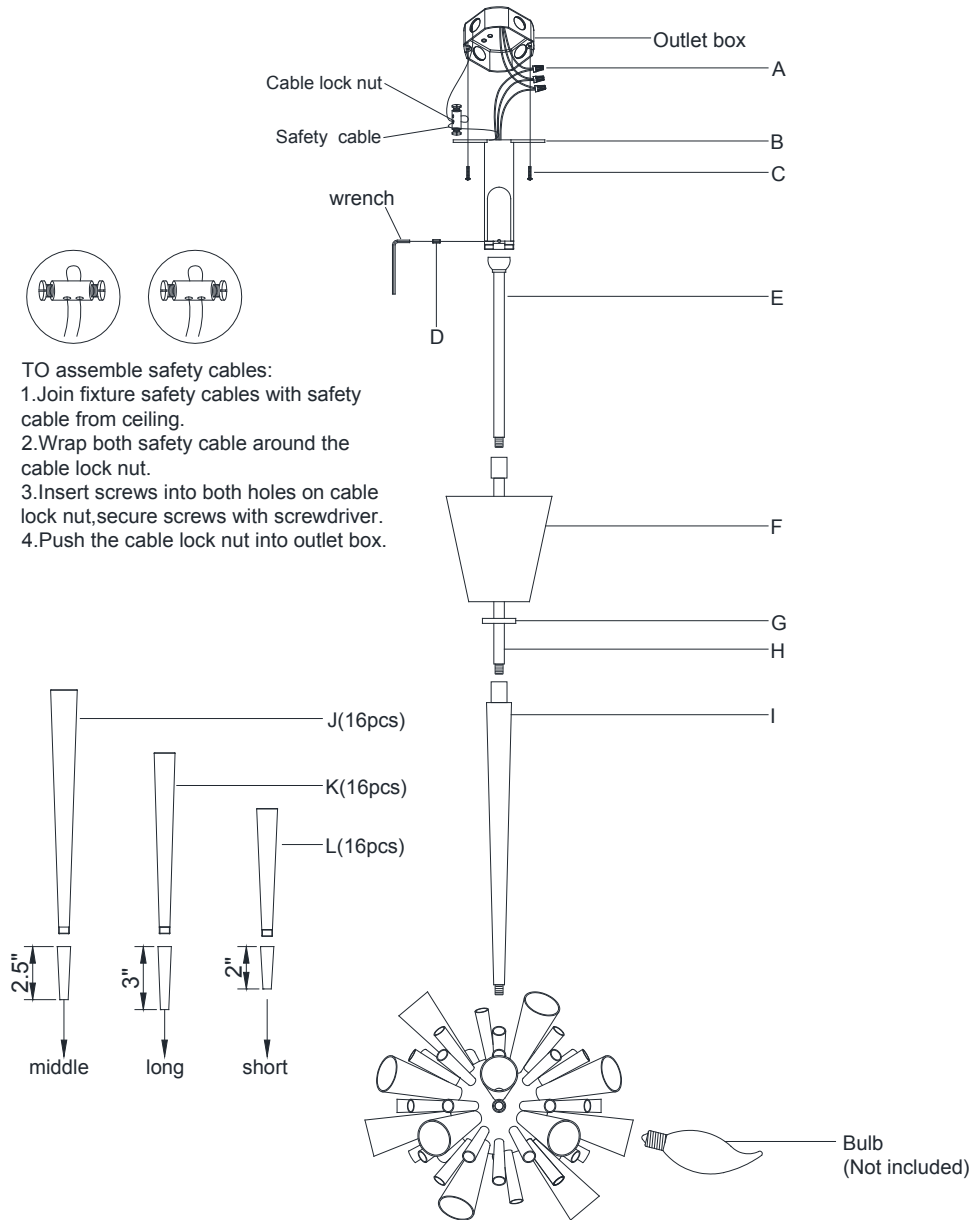

**TO assemble safety cables:**  
 1. Join fixture safety cables with safety cable from ceiling.  
 2. Wrap both safety cable around the cable lock nut.  
 3. Insert screws into both holes on cable lock nut, secure screws with screwdriver.  
 4. Push the cable lock nut into outlet box.

## Chiara Large Sputnik Chandelier

Item # JN 5119

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING\*\*\*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

- Carefully remove all parts from the box.
- Thread the tube (I) to the top of the fixture body, then thread the tube (H) to the tube (I).
- Let the Lock collar (F) and canopy (E) pass through the tube (H), then thread the tube (E) to the tube (H).
- Install the mounting plate (B) to the outlet box by mounting screws (C) provided.
- Attach the tube (E) to the mounting plate (B) and secure with screw (D) by using the wrench.
- Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

- Connect the fixture Neutral wire (ribbed, no markings) with the neutral wire from the outlet box using wire nut (A).
- Connect the fixture Hot (smooth edge, markings) wire with the hot wire from the outlet box using wire nut (A).

DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.

- Tuck these wire connections neatly into the outlet box to secure.
- Put canopy (F) to the mounting plate (B) and secure with lock collar (G).
- Thread the longer acrylic bar (J) to the middle length metal part on the fixture body.
- Thread the middle length acrylic bar (K) to the longer metal part on the fixture body.
- Thread the shorter acrylic bar (L) to the shorter metal part on the fixture body.
- Insert bulbs (not included) into the sockets.
- Installation is complete, turn on power at fuse or circuit breaker.

\*\*\*Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.

