


## ASSEMBLY INSTRUCTIONS

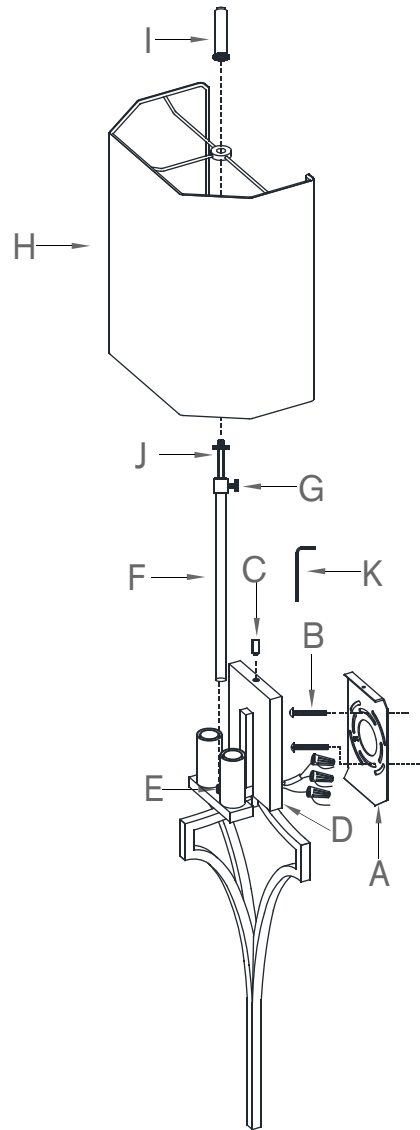

### Pietro Large Sconce Item # TOB 2750

**WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.**

**WARNING \*\*\* SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

**INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL. IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT, DO NOT INSTALL.**

**ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.**

1. Carefully remove all parts from the carton.
2. Remove mounting plate (A) from base of light fixture (D) by removing set screw (C) using Allen wrench (K) provided.
3. Affix mounting plate (A) to wall outlet box with mounting screws (B) provided.
4. Attach ground (green or green/yellow) wire to ground wire from wall outlet box (usually green or copper in color ), fasten both together with a plastic wire connector. Tightly wrap the wire connector with electrical tape, so the end of the connector is sealed. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
5. Connect both neutral (white ) fixture wire coming from fixture base to neutral (usually white ) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
6. Repeat the same procedure with the hot (black) wires. Always make sure that no wire strands lie outside the connectors. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
7. Attach fixture base (D) to the affixed mounting plate (A) and secure with set screw (C). Tighten with Allen wrench (K) provided.
8. Screw connection rod (F) onto the nipple (E) by turning in a clockwise-direction until tight.
9. Insert light bulbs (not included) into the sockets.
10. Remove finial (I) from connection rod (F), attach shade (H) onto the top of connection rod (F) and secure with finial (I).
11. Restore power and test fixture. Installation is complete.

#### TO ADJUST:

1. Loosen knob (G).
2. Adjust the upper rod (J) up or down to get desired height.
3. Tighten knob (G).

\*\*\* Clean with a dry, soft cloth only. Use no harsh abrasives or chemical agents.